

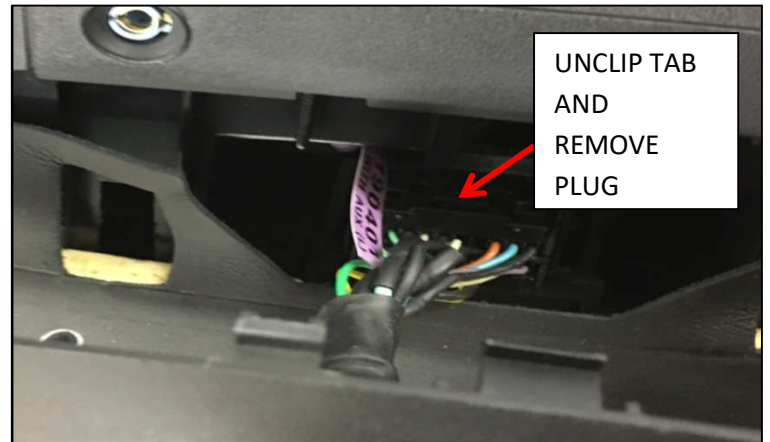


# VE REAR SEAT ENTERTAINMENT SCREEN ASSY REMOVAL GUIDE



1. Firstly remove headrest from seat.
2. Using panel removal tool or something similar remove the plastic panel to access the wiring plug and unclip the plug at the following point

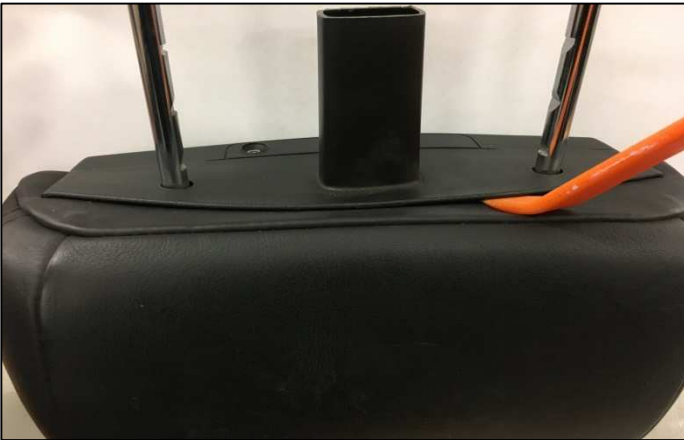

3. Remove the 2 x screws and lift up surround from the bottom and pull the top of the screen out, it can take a little force as it can be quite tight.

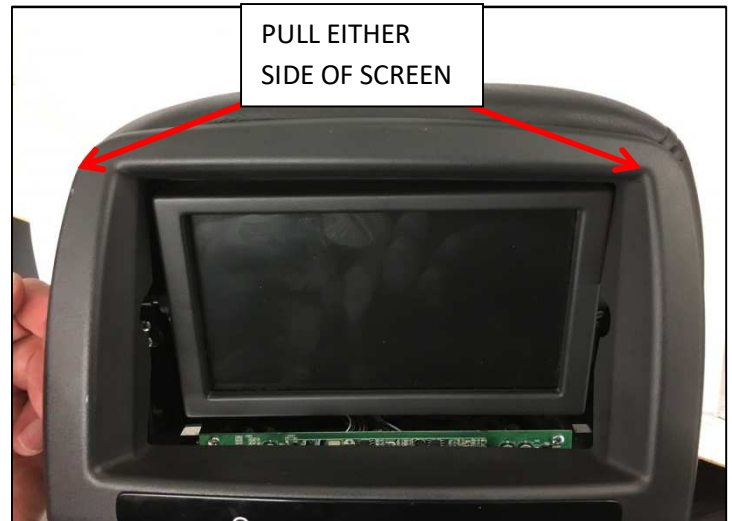

4. Remove the 2 screws from either side and turn screen upside down and unclip the plastic surround at the 4 points and then remove the harnesses from the top of the screen.

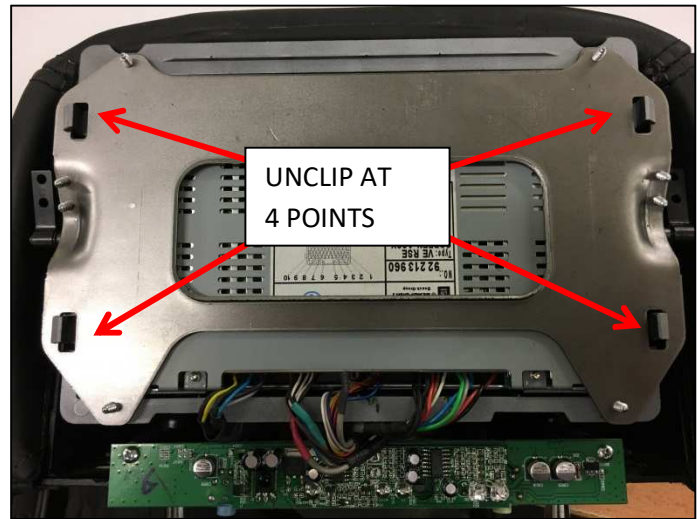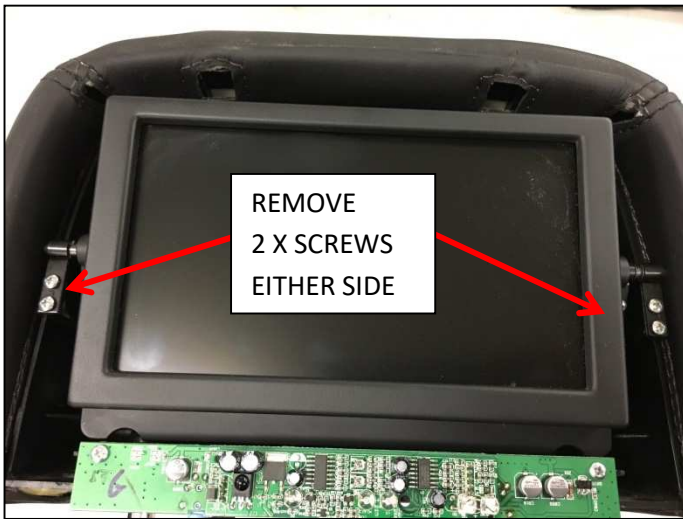

5. Remove the wiring harnesses at the following points. Screen removal is complete.



NOTE BEFORE SENDING:

- PLEASE SUPPLY FULL NAME AND ADDRESS AND CONTACT DETAILS
- ONLY SEND THE SCREEN - DO NOT SHIP THE COMPLETE HEADREST OTHERWISE EXTRA SHIPPING CHARGES WILL APPLY

PLEASE SEND FAULTY SCREEN TO:

ATT: SERVICE

ASL AUTOMEDIA

13 COMMERCIAL DRIVE

LYNBROOK VICTORIA 3975